

Prestige 40 Header

The flexible choice for the production of tubes.

PackSys Global's new generation Prestige 40 Header is a jewel of innovation. The machine provides unbeaten flexibility for today's and tomorrow's competitive tube production and challenging market requirements. It ensures high reliability and consistent overall efficiency at an optimum production speed.

This fully electric machine is designed for maximum production output, with a quick size parts change and cost-saving size parts. An innovative and precise pressing process provides the highest tube


quality at lowest maintenance costs. The machine can be adapted to any application: used as a stand-alone unit or placed directly in-line with extruders, side-seamers, printers and cappers.

Thanks to the clever HMI concept the machine is easy to operate providing shortest possible setup times.

Stay competitive in the global market with this compact and flexible tube heading system.

Your Benefits

- 120 tubes/min (plastic or laminate)
- Heading round, oval or other shapes
- Ideal efficiency for all batch sizes
- Quick size parts change and short setup time
- Size parts compatibility with Prestige 20
- Easy to operate system
- High quality Swiss engineering
- Competent and fast customer service

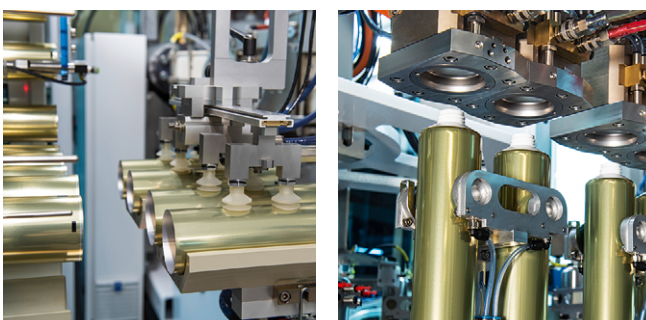

Prestige 40 Header



Technical and Operational Details

Reliable tube production at the highest quality is ensured by:

- Upright mandrel principle
- Perfect round donut for symmetrical compression of shoulder material
- Quick size parts change and short setup time
- Smart size parts concept with Prestige 20 compatibility
- Fast color change
- Fully electric machine and clever HMI concept
- Precise and perfectly controlled pressing system ensures high tube quality
- Maximized cooling capacity

Flexibility

- Plastic or laminate tubes
- Heading round, oval or other shapes
- Wide tube diameter range
- Stand-alone system or inline integration with buffer
- Optional tube inspection system

Tubes

- 120 tubes/minute continuous operation
- Full production speed after size parts change from the first tube onwards
- Ideal efficiency for all batch sizes

Quality

- Consistent high level of overall quality from first to last tube
- Storage and monitoring of all production parameters
- High quality Swiss engineering
- Competent and fast customer service

Investment Protection

- Low maintenance costs
- Attractive cost/benefit ratio
- Optimized size parts costs
- High production uptime
- Low energy consumption

Technical data

Tube diameter	16 – 50 mm
Tube length	50 – 220 mm
Production speed	120 tubes/min

Tube diameter 13.5 – 16 mm / 50 – 63.5 mm possible with special size parts